Modulo NFR Timber Doorset

Product Datasheet

NFR Configurations

Single Doorset

Latched, Single Action, Single Doorset (LSASD) Unlatched, Single Action, Single Doorset (ULSASD)

Double Doorset

Latched, Single Action, Double Doorset (LSADD) Unlatched, Single Action, Double Doorset (ULSADD)

Acoustic Rating			
ModuCore BB with Dropseal fitted	Up to 30dB (Single doorset only)		
ModuCore TC	n/a		
ModuCore HC	n/a		
Door Weights			
ModuCore BB (44mm)	24.5 kg/m²	ModuCore HC (44mm	8.62 kg/m ²
ModuCore TC (44mm)	21.97 kg/m²	ModuCore PB (44mm)	27.3 kg/m²



Door Leaves	ModuCore BB (Stock)	ModuCore TC (To order)	ModuCore HC (To order)	ModuCore PB (To order)
Minimum Height	1000mm	1981mm (Imperial) / 2040m	m (Metric)	
Maximum Height	2040mm	1981mm (Imperial) / 2040m	m (Metric)	
Standard Widths	326, 426, 457, 492, 526, 533, 560, 592, 610, 626, 660, 692, 711, 726, 762, 792, 810, 826, 838, 861, 892, 914, 926mm	457, 533, 610, 686, 711, 762 426, 526, 626, 726, 826, 92	2, 813, 838, 864, 914mm (Impe 26mm (Metric)	erial)
Door Core				
Construction	Solid timber blockboard	Tubular core with MDF	Honeycomb core with MDF	Particle board with MDF

Door Leaf Finishes - Please see end of Datasheet

core with MDF facings and

ABS edging



Construction

facings, timber sections


to perimeter ABS edging

facings, timber sections to

perimeter ABS edging

facings and ABS edging

Frame Options

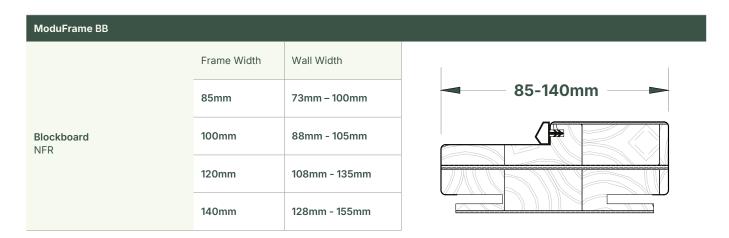

ModuFrame MDF			
	Frame Width	Wall Width	
	85mm	73mm – 100mm	⋖ 85-140mm ►
Medium-density Fibreboard NFR	100mm	88mm - 105mm	
	120mm	108mm - 135mm	
	140mm	128mm - 155mm	


ModuFrame MDF Loose Stop			
	Frame Width	Wall Width	[25] (m. 16) (m. 16
	85mm	73mm – 100mm	
Medium-density Fibreboard NFR	100mm	88mm - 105mm	■ 85-140mm ■
	120mm	108mm - 135mm	
	140mm	128mm - 155mm	

Frame Finishes

Stock RTP Ready to Paint

CPL Laminate Light Oak Mid Oak Chalk White Slate Grey
Bespoke finishes available (Min. order qty applies)



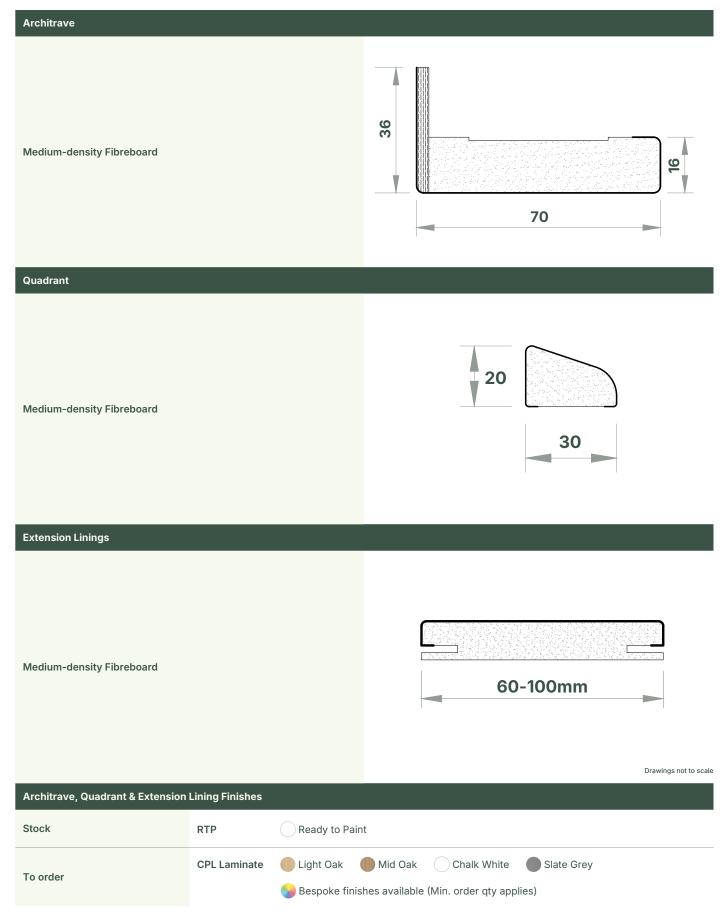



Modulo NFR Timber Doorset

Product Datasheet

Ironmongery	Description	Part No.
Hinges	102 × 76mm G13 SSS BB Butt Hinge Rad Corners	SEL-PRT-01766
Closers	Overhead Door Closer EN3 Overhead Door Closer EN2-4 BC EN2-4 Scissor Arm Closer +Backcheck Function (Satin Nickel) EN2-4 Scissor Arm Closer +Delayed Action & Backcheck (Silver) EN2-5 Scissor Arm Closer Basic (Satin Nickel) EN2-5 Scissor Arm Closer +Delayed Action & Backcheck (Satin Nickel) EN2-5 Scissor Arm Closer +Delayed Action & Backcheck (Satin Nickel) Electromag Hold Open Closer Responder24 EN4 (Satin Nickel) EN2-4 Cam Action Slide Arm Closer (Satin Nickel) Pair EN2-4 & EN3 Scissor Arm Closer Basic (Satin Nickel)	SEL-PRT-02574 SEL-PRT-02575 SEL-PRT-02575 TBC SEL-PRT-02577 SEL-PRT-02576 SEL-PRT-02568 SEL-PRT-02647 SEL-PRT-02575 & SEL-PRT-02574
Latches/Locks	DIN Standard Mortice Latch DIN Standard Mortice Sashlock DIN Standard Mortice Deadlock DIN Standard Mortice Bathroom Lock 76mm Tubular Latch Mechanical Codelock with lever handle	SEL-PRT-02244 SEL-PRT-02248 SEL-PRT-02246 SEL-PRT-02245 SEL-PRT-02133 SEL-PRT-02634 / SEL-PRT-02299 / SEL-PRT-01639
Lever handles	19mm RTD SSS Levers on Round Rose	SEL-PRT-02542
Pull handles	425 × 19mm SSS B/F 'D' Pull Handle Customers own (subject to approval)	SEL-PRT-02034 N/A
Pushplate	500 × 90mm SSS Finger Plate Sq Corners	SEL-PRT-02044
Kickplate	200mm high x 1.2mm SSS Kickplate Sq Corners (to suit door width)	SEL-PRT-02023 - XXXX
Cylinders	70mm SC Euro Double Cylinder KD 70mm SC Euro Cylinder & Thumbturn KD	SEL-PRT-01247 SEL-PRT-01409
Escutcheons	52 × 8mm SSS Euro Profile Escutcheon 52 × 8mm SSS Blank Escutcheon Euro Cylinder Pull SSS	SEL-PRT-02048 SEL-PRT-02050 SEL-PRT-02253
Bathroom indicator	52 × 8mm SSS Disabled Turn & Release with Indicator	SEL-PRT-02051
Flushbolts	200 × 20mm SSS Lever Action Flush Bolt Rad End	SEL-PRT-01995
Air transfer grills (pairs)	Air Transfer Grill - 300×300mm (NFR) Air Transfer Grill - 350×350mm (NFR) Air Transfer Grill - 400×400mm (NFR)	SEL-PRT-02515 SEL-PRT-02516 SEL-PRT-02517
Signage	76mm Dia' Disabled Symbol 76mm Dia' Female Symbol 76mm Dia' Male Symbol 76mm Dia' Unisex Symbol 76mm Dia' WC Symbol 76mm Numeral Self-Adhesive. 0-9 and A, B & C	SEL-PRT-02566 SEL-PRT-02569 SEL-PRT-02572 SEL-PRT-02579 SEL-PRT-02580 SEL-PRT-02119 - SEL-PRT-02131
Door stop	Pedestal Floor Doorstop	SEL-PRT-02556
Dropseal	Concealed Dropseal (to suit door width)	SEL-PRT-02497 - SEL-PRT-02507

As standard, ironmongery is 'Satin Stainless Steel' style.




Vision Panels			
Reference	Type A	Туре В	Туре С
Clear vision	1470×170mm	745×170mm	745×170mm & 495×170mm
Glass	6.4mm clear laminated		
Margins	150mm of margin to top and leading edge of door leaf		
Minimum door width	526mm - Contact Selo if a smaller width door is required		
Finish	Lacquered Oak - Used in all finished laminate door leaves White Primed - Used in RTP door leaves		

Threshold (If required)


8mm thick

Hardwood, flat strip with width to suit frame



15mm thick

Hardwood, flat strip with width to suit frame



Drawings not to scale



Modulo NFR Timber Doorset

Product Datasheet

Door Leaf Finishes	Moducore BB (Stock)	To order
Ready to Paint	Matt Paper	Matt Paper
White Laminate Melamine faced MDF	Chalk White	Bespoke finishes available (Min. order qty applies)
Wood Grain Laminate/Veneer Melamine faced MDF	Light Oak Mid Oak	Bespoke finishes available (Min. order qty applies)
Solid Colour Laminate Melamine faced MDF	Slate Grey	Bespoke finishes available (Min. order qty applies)

